iMIX®-5S+ Top Hinge

Height: 32.8" Width: 19.3" Depth: 24.0" (83.3cm) (49.0cm) (61.0cm)



- 7gal (26.5L) hot water tank to meet peak serving times
- Alphanumeric display allows adjustments and service operational testing from front of machine. Also communicates advertising messages, machine status and technical support contact information
- Can be set as push and hold or single size portion control
- Capacity: Five 8lb (3.6kg) hoppers
- Cup clearance at 7.25" (18.4cm) to accommodate popular cup sizes [adjustable to 8.12" (20.6cm)]
- Easily removable side panels for complete access to service components
- Front of machine access to tank drain, dump valves, auger and whipper motors and control board for easy service set up and calibration
- High speed heavy-duty whipper for complete product mixing
- High efficiency LED lighted front graphics for merchandising
- Spring-loaded, all metal auger drive system for easy hopper installation
- Variable speed motors allow control of product consistency in mixing chamber (.75 to 6.6 grams of powder per second)

Additional Features

Agency:





Specifications

Product #: 38100.0050 **Door:** Lit

Water Access: Plumbed Door: Top Hinge

Finish: Black Dispense: Portion Control
Hoppers: Five Dispense: Push Button

Electrical & Capacity

Volts*	Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H ² O Temp.	Phase	# Wires plus Ground	Hertz
120	15	1800	Yes	NEMA 5-15P	72	60°F (15.5°C)	1	2	50/60

"When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

Plumbing Requirements


PSI	kPa	Fitting Supplied	Water Flow Required (GPM)
20-100	138-689	1/4" Male Flare Fitting	-

CAD Drawings

2D		Revit	KLC		
	•	•	•		

MARNING:



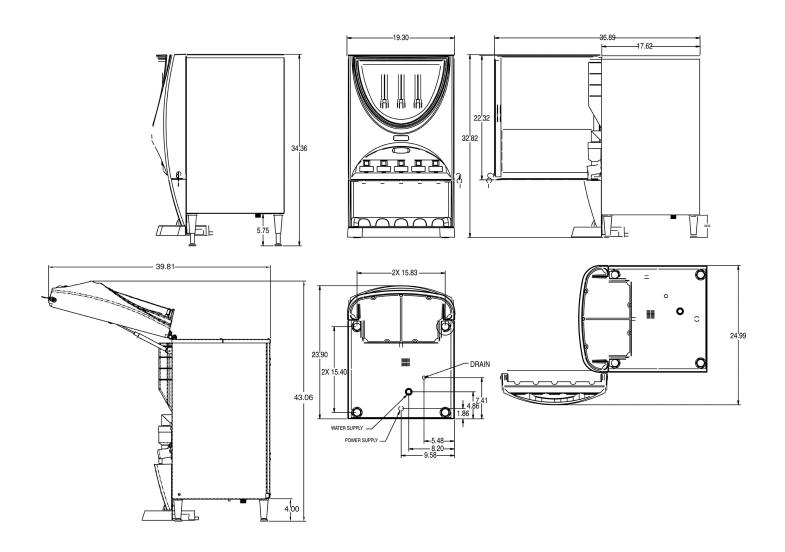


Unit				Shipping				
	Height	Width	Depth	Height	Width	Depth	Weight	Volume
English	32.8 in.	19.3 in.	24.0 in.	40.4 in.	23.2 in.	28.9 in.	136.000 lbs	15.676 ft³
Metric	83.3 cm	49.0 cm	61.0 cm	102.6 cm	58.9 cm	73.4 cm	61.690 kgs	0.444 m³



Related Products & Accessories:iMIX®-5S+ Top Hinge(38100.0050)

























Serving & Holding Options: iMIX®-5S+ Top Hinge(38100.0050)
*Serving and Holding selections are currently unavailable. Please contact your sales representative to find out more information.

