

Airpot Coffee Brewer

Features

Airpot Coffee Brewer

- Brews directly into 1.9 to 3 litre airpots.
- Convenient airpots keep coffee hot for hours.
- Airpots are easily transported to remote meeting rooms, breakfast bars, etc.
- Pourover model available (CW-APS).
- Pourover feature included on automatic models.
- Gourmet funnel model available for use with heavier throw weights of coffee.
- Digital timer enables users to make brew cycle adjustments from the front panel.
- Brew capacity varies by model. See back for details.



CWTF APS with Airpot

(airpot sold separately)

Dimensions: 23.6" H x 9" W x 18.5" D
(59.9cm H x 22.9cm W x 47cm D)



CWA APS with Airpot

(airpot sold separately)

Pourover Model/No Faucet

For current specification sheets and other information, go to www.bunn.com.

International models may vary in appearance.

Related Products

Easy Clear® EQ-17-TL

Product No. : 30200.1000

Easy Clear® ED-17-TL

Product No. : 30201.1001

Paper Filter Pack

Product No. : 20115.0000



2.2 liter Push-Button Airpot

Product No. : 28696.0002

2.5 liter Push-Button Airpot

Product No. : 13041.0001

2.5 liter Lever-Action Airpot

Product No. : 32125.0000

3.0 liter Lever-Action Airpot

Product No. : 32130.0000



Universal Airpot Racks
for push-button and lever-action airpots.



Gourmet C Funnel

Product No.: 34559.0000

(18.1cm width)

34559.0001 (19.4cm width)



Dimensions & Specifications

Model	Product #	Volts	Amps	Total Watts	Brewing Capacity	Shipping Weight	Cord Attached	Agency
CWA-APS* 50/60Hz	23001.0024	230	9.0	2075	5.2 gal./hr. (19.7 L./hr.)	28 lbs. (12.7 kg)	No	CE V P G NSF
CWA-APS* 60Hz	23001.0064	220	8.6	1900	3.8 gal./hr. (14.4 L./hr.)	26 lbs. (12.7 kg)	No	CE NSF
CWA-APS* 50/60Hz	23001.0074	230	9.0	2075	3.8 gal./hr. (14.4 L./hr.)	26 lbs. (12.7 kg)	Yes UK Plug	CE NSF
CWA-APS* 50Hz	23001.0093	230	8.3	1900	7.5 gal./hr. (28.4 L./hr.)	26 lbs. (12.7 kg)	Yes IRAM model	CE V
CWA-APS** 60Hz	23001.0094	230	14.2	3260	5.1 gal./hr. (19.3 L./hr.)	26 lbs. (12.7 kg)	Yes INMETRO model	INMETRO
CWTFA35-APS 50/60Hz	23001.0019	230	14.2	3260	5.1 gal./hr. (19.3 L./hr.)	37 lbs. (16.8 kg)	No	CE V P G NSF
CWTFA-APS 50/60Hz	23001.0021	230	9.0	2075	5.1 gal./hr. (19.3 L./hr.)	37 lbs. (16.8 kg)	No	CE V P G NSF

Power cord 27728.0001

*Pourover model.


**Gourmet funnel

Brewing capacity: based upon incoming water temp of 60°F/15.5°C (140°F/60°C rise) per 1/2 gallon brew time of 4 minutes.

Electrical: 230V model requires 2 wires plus ground service rated 220-240V, single phase, 50/60 Hz.

220V model requires 2 wires plus ground service rated 220-240V, single phase, 60Hz.

Plumbing: 20-90 psi (138-621 kPa). Supplied with 1/4" male flare fitting.

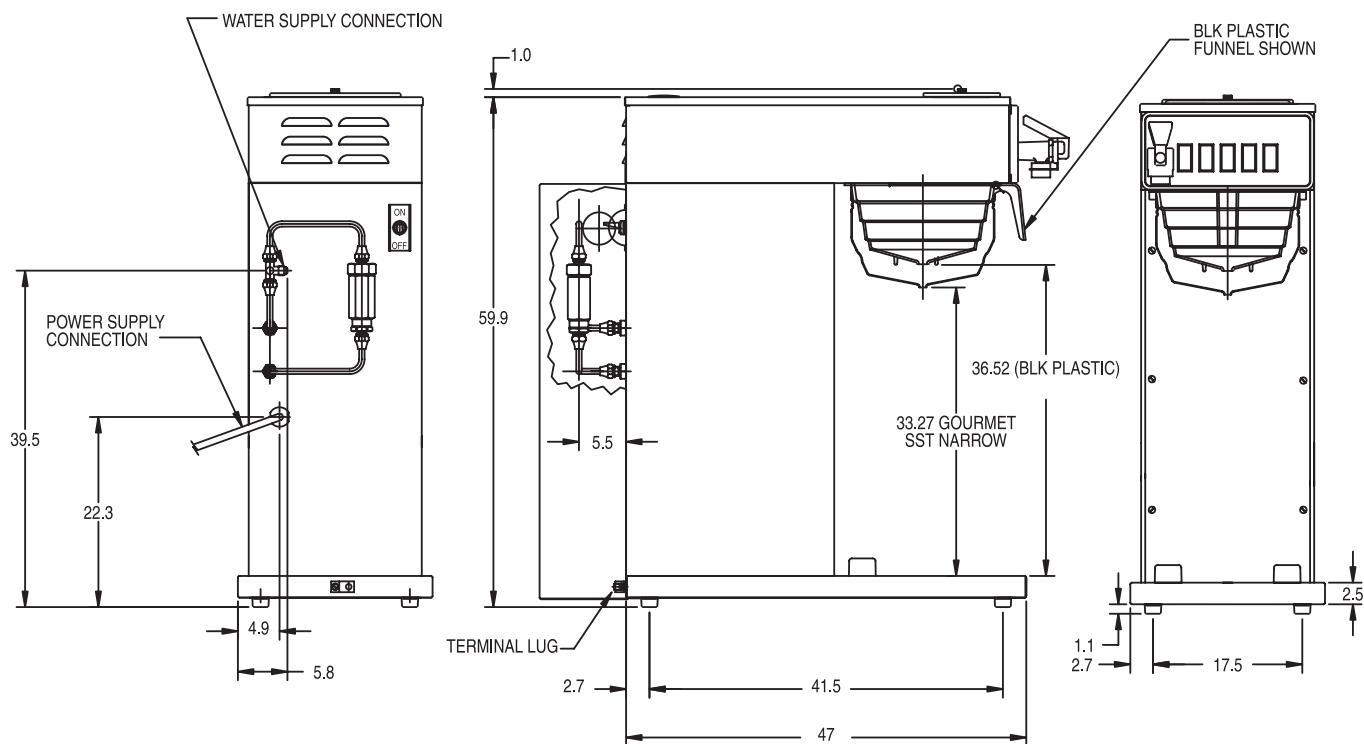

Bunn-O-Matic® Corporation - 1400 Stevenson Drive Springfield, Illinois 62703 • USA • +1-217-529-6601 • Fax +1-217-529-2827 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in centimeters.

10/11 © Bunn-O-Matic Corporation