

Low Profile Liquid Coffee Ambient Dispenser

Features

Low Profile Ambient Dispenser

- Attractive appearance with shorter profile.
- Dispense over 125 (5 oz.) cups per hour.
- Accommodates two .5 gallon bag-in-box (BIB).
- Serves two coffee products and hot water.
- Refill LED lights alert the operator when more concentrate is needed.
- Rinse LED lights alert the operator when cleaning is needed.
- Set up for continuous dispense (by the cup) for self-serve applications or portion-control to fill cups or carafes.



Model LCA-2 LP

Dimensions: 23.2" H x 15.78" W x 20.9" D
(58.9 cm H x 40.1 cm W x 53 cm D)


For current specification sheets and other information, go to www.bunn.com.

Related Products

Easy Clear® EQHP-10L
Product No. : 39000.0001
Use with 1.8 oz/sec. flow rate.



1/8" Replacement tube kits
Product No. : 37942.1000



Drip Tray Drain Kit
Product No. : 37309.0000



50 ml Graduated Cylinder Kit
Product No. : 34843.1000
For use in calibration of pumps.

Adapter/Tube Package
Scholle 1910
Product No.: 38800.0200

Adapter/Tube Package
QCDII
Product No.: 38800.0201

Adapter/Tube Package
Scholle Q/C
Product No.: 38800.0202

Adapter/Tube Package
Rapak
Product No.: 38800.0203

Model

LCA-2 LP

Agency Listing

Dimensions & Specifications

CANADA




Model	Product Number	Dispense Rate 1.7 oz. Product Ratios	Connector Type	Volts	Amps	Htr Watts	Total Watts	Capacity* per hr	Cubic Ft ³ /m ³	Weight lbs/kg	Cord Attached
LCA-2,LP	38800.6000	25:1-100:1	Scholle 1910LX	120	12	1425	1440	120 cups	10.9/.308	65 / 29.5	Yes
LCA-2,LP	38800.6001	25:1-100:1	QC/D II	120	12	1425	1440	120 cups	10.9/.308	65 / 29.5	Yes
LCA-2,LP	38800.6002	25:1-100:1	Scholle QC	120	12	1425	1440	120 cups	10.9/.308	65 / 29.5	Yes
LCA-2,LP	38800.6003	25:1-100:1	Rapak	120	12	1425	1440	120 cups	10.9/.308	65 / 29.5	Yes

*Capacity measured with a 5 oz. cup.

Electrical: 120V model requires 2-wires plus ground service rated 120V, single phase, 60 hz.
Power cord (NEMA 5-20P) 20 Amp-120V attached.

Plumbing: 20-90 psi (138-621 kPa) from a ¼" (6.35 mm) or larger supply line. Unit requires a 1 gpm line flow capacity. A shut-off valve should be installed in the line before the unit. Install a regulator in line when pressure is greater than 90 psi to reduce pressure to 50 psi. Supplied with ¼" (6.35 mm) male flare fitting.

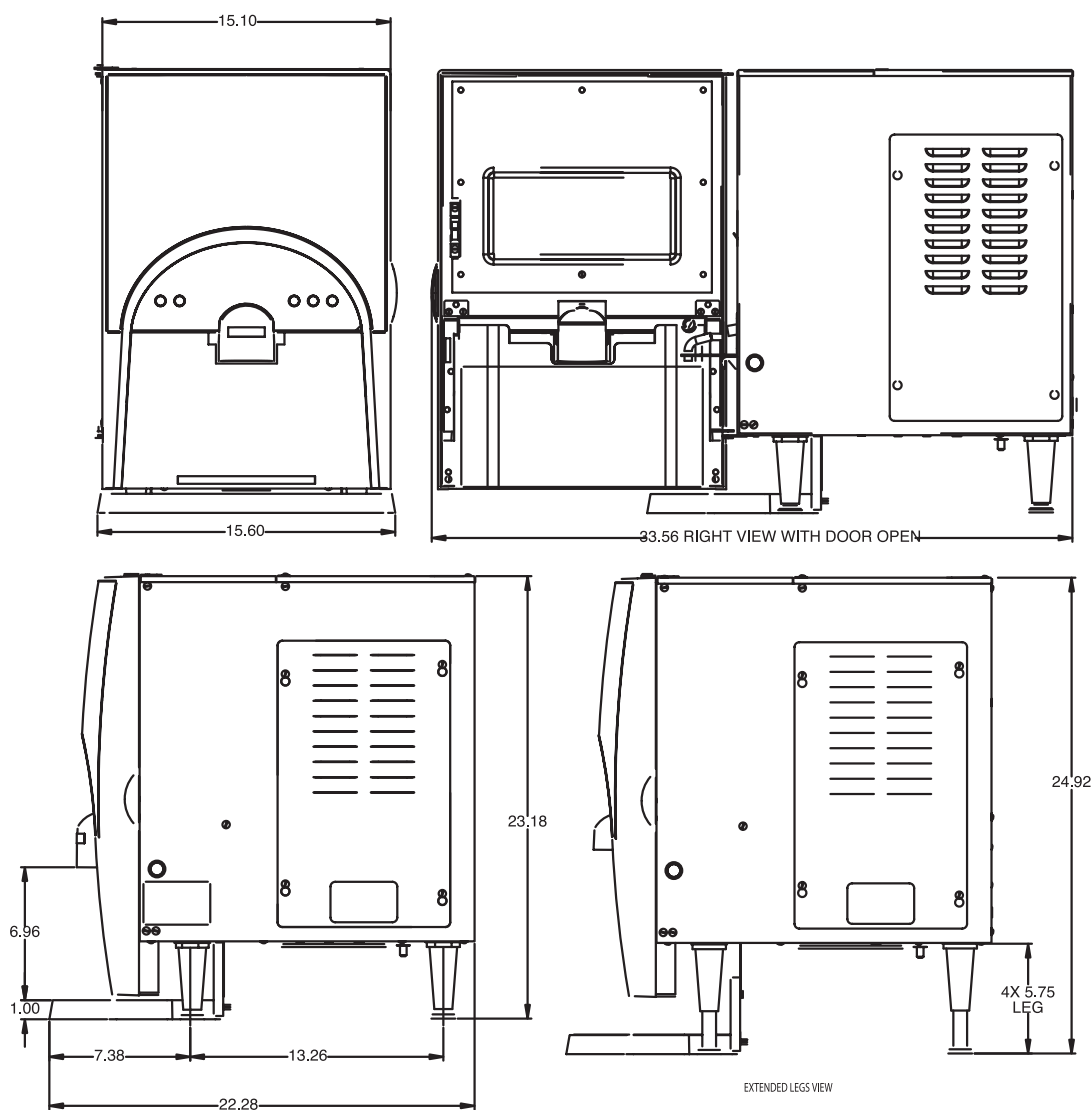

Bunn-O-Matic Corporation of Canada - 280 Industrial Pkwy. S. Aurora, Ontario L4G 3T9 • 905-841-2866 • Fax 905-841-2775 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in inches. Bunn Corporation owns all copyrights relating to materials in this publication. Please contact Bunn Corporation to request permission to reproduce any portion of this publication.