

trifecta® Single Cup Brewer



trifecta Single Cup Brewer

Dimensions: 26.73"H x 11.89"W x 11.87"D
(67.9cm H x 30.2cm W x 30.1cm D)

Features

Tech enabled barista crafted single cup

Every coffee has a voice. With the trifecta, the barista creates an experience which unlocks the nuances of that coffee. Using an air infusion single cup process, the trifecta brews so that each coffee's unique voice resonates.

trifecta brewing phases:

1 Wetting

The saturation of the coffee grounds can be controlled to get the percentage of water and pause appropriate for that coffee.

2 Extraction

Controlled air is injected into the brew chamber to agitate the coffee at just the right time. The result is a uniform extraction and complex beverage sure to please any coffee lover.

3 Hydrolysis

Air presses the beverage through a metal screen that filters out coffee grounds while preserving coffee oils and aromatics for a deep-bodied, unique coffee experience.



back view

Related Products

trifecta Brew Chamber

Product No. : 43279.1000



trifecta Cleaning Tablets

Product No. : 42933.1000



trifecta Cup Assembly

Product No. : 42388.1000



G2 trifecta Grinder

Product No. : 41900.0001
(230 volt model)

Product No. : 41900.0002
(100 volt model)



trifecta Check Valve

Product No. : 42610.1000



trifecta Accessory Kit

Product No. : 42768.1000

www.trifectaexperience.com



Dimensions & Specifications


Model	Product #	Volts	Amps	Total Watts	Shipping Weight	Cord Attached	Agency
TRIFECTA	41200.0001	230	5.8	1330	41.7 lbs (18.9 kg)	Yes Euro Plug	CE
TRIFECTA	41200.0002	100	14.0	1400	41.7 lbs (18.9 kg)	Yes	
TRIFECTA	41200.0003	230	5.8	1330	41.7 lbs (18.9 kg)	Yes INMETRO Plug	INMETRO
TRIFECTA	41200.0004	220	6.0	1330	41.7 lbs (18.9 kg)	Yes KETI Plug	KETI

Electrical: 230V model requires 2-wires plus ground service rated 220-240V, single phase, 50/60Hz.

100V model requires 2-wires plus ground service rated 100V, single phase, 50/60Hz.

220V model requires 2-wires plus ground service rated 220V, single phase, 60Hz.

Plumbing: 20-90 psi (138-621 kPa). Supplied with 1/4" (6.4 mm) male flare fitting.

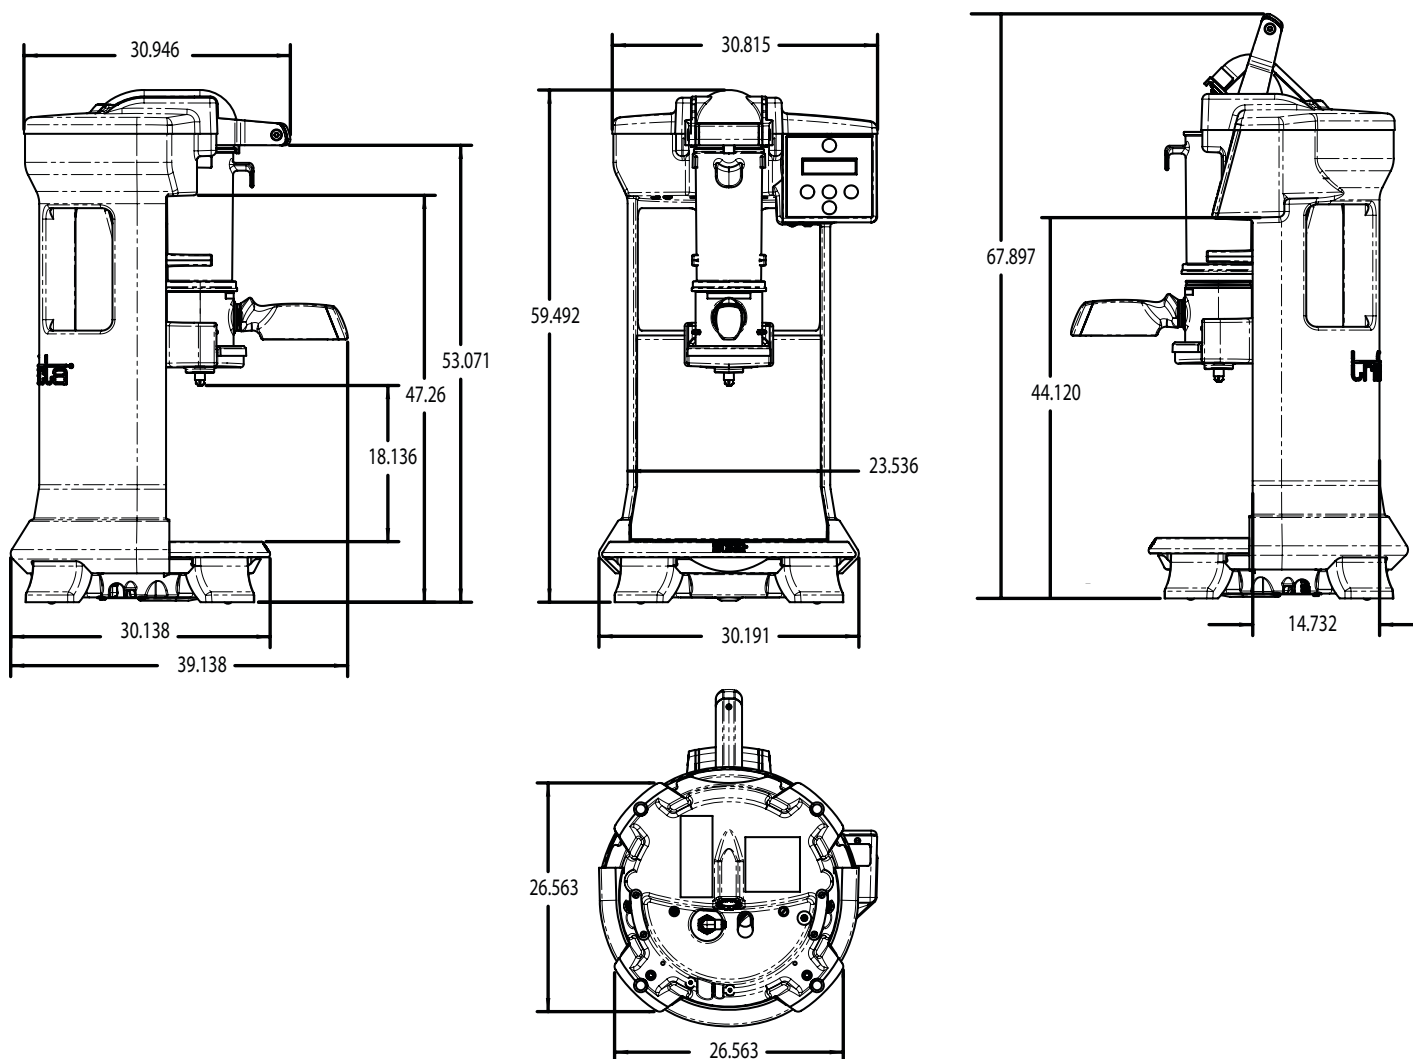

Bunn-O-Matic® Corporation - 1400 Stevenson Drive Springfield, Illinois 62703 • USA • +1-217-529-6601 • Fax +1-217-529-2827 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in centimeters.

10/12 © Bunn-O-Matic Corporation