



ITEM: _____ PROJECT NAME: _____ DATE: _____

HIGH VOLUME REFRIGERATED MAXI DELI CASE

- MODEL**
- ☐ MSG-454-DC
 - ☐ MSG-654-DC
 - ☐ MSG-854-DC
 - ☐ MSG-1054-DC



*The Maxi Deli delivers full-size capacity with presentation and value in mind.
Cases are available in lengths of 4', 6', 8' and 10'. Designed for continuous line-ups.*




STANDARD FEATURES

- Lift-up, pneumatic, cylinder-assisted, tempered thermopane straight front glass.
- Tempered end glass and rear doors.
- Stainless steel deck.
- Fold-down rear wrapping board.
- Coated evaporator coil(s).
- Adjustable temperature control.
- Adjustable lighted mezzanine shelf.
- Thermometer.
- Accepts full-size deli risers and meat trays.
- Self-contained with condensate evaporator pan/ Remote refrigeration available.
- Double-duty, refrigerated pull-out storage drawers. 4' has one drawer, 6' and 8' have two drawers, 10' has three drawers.
- Stainless steel exterior finish/Laminated finishes available.
- Gravity coil.
- UL Safety and UL Sanitation Listed.
- Decorative end panels and front bumper rail available in white, black, gray and green.
- Designed for continuous case line-ups.
- Appliance receptacle provided on back.

HIGH VOLUME REFRIGERATED MAXI DELI CASE

OPTIONAL ACCESSORIES:

- ☐ Special Color
- ☐ Laminated Base
- ☐ Additional Lighted Mezzanine Shelf
- ☐ Paper Roll Cutter/Holder
- ☐ Reflective Ends
- ☐ Reflective Doors
- ☐ Remote Refrigeration
- ☐ Scale Stand
- ☐ Slicer Stand
- ☐ Deli Step Pan Holder or Risers
- ☐ Promolux Lighting
- ☐ LED Lighting
- ☐ Cord & Plug
(Self-Contained Models Only, NEMA 5-20P)

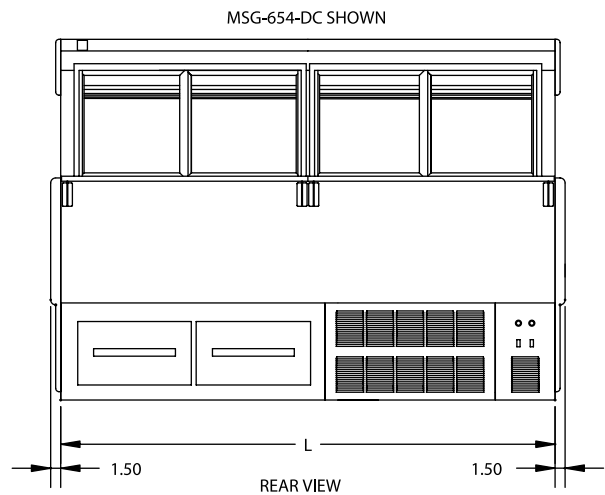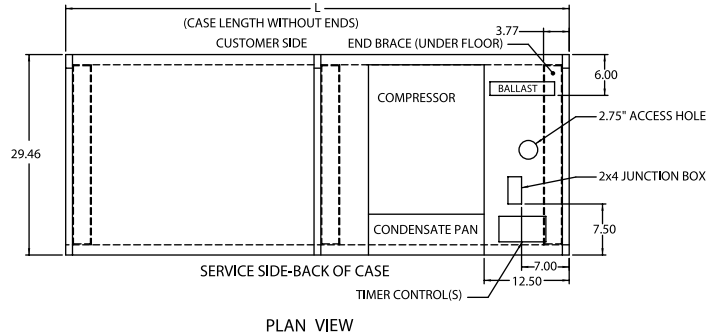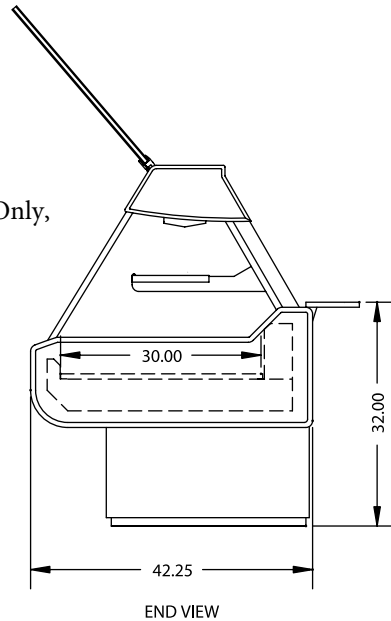

SPECIFICATIONS:

Model	Dimensions L W H	Shipping Weight (lbs)	Capacity (Step Pans)	*Self-Contained 120/60/1	*Remote 120/60
MSG-454-DC	50" x 42 1/4" x 54"	730	4	3/4 HP - 15.4 AMPS	10.4 AMPS
MSG-654-DC	74" x 42 1/4" x 54"	930	6	3/4 HP - 15.6 AMPS	10.6 AMPS
MSG-854-DC	98" x 42 1/4" x 54"	1,210	8	3/4 HP - 15.8 AMPS	10.8 AMPS
MSG-1054-DC	122" x 42 1/4" x 54"	1,530	10	3/4 HP - 16.0 AMPS	11.0 AMPS

- If a GFCI circuit is required, a GFCI Breaker Must be used instead of GFCI receptacle.
- Includes general purpose receptacle 120V, 3AMP.
- Refrigerated cases are designed to operate in a maximum environment of 75° ambient and 55% relative humidity.
- Due to continuing engineering improvements, specifications are subject to change without notice.



Look to Federal for Innovative Merchandising



The Signature of Quality®

FEDERAL INDUSTRIES
A Standex Company

215 FEDERAL AVENUE, BELLEVILLE, WISCONSIN 53508-9201

PHONE: 800-356-4206

EMAIL: geninfo@federalind.com

FAX: 608-424-3234

WEBSITE: www.federalind.com

