



a Standex company

ITEM: _____ PROJECT NAME: _____ DATE: _____

MARKET SERIES REFRIGERATED BAKERY CASE

- MODEL** ☐ **SQ-3CB**
☐ **SQ-4CB**
☐ **SQ-5CB**
☐ **SQ-6CB**
☐ **SQ-8CB**



Panel base shown

Market Bakery. The low profile merchandiser that provides solutions to your merchandising needs. Cases are available in lengths of 3', 4', 5', 6', and 8'.

Designed for continuous case line-ups without middle end glass.


STANDARD FEATURES

- Lift-up, pneumatic, cylinder-assisted curved front glass.
- Four-point leveling system.
- Rear work counter.
- Octron top light and shelf lights. Lights are shielded and independently wired.
- Two tiers tempered glass shelves.
- Pedestal or panel base design.
- Tempered front and end glass.
- **Removable rear door assembly. Doors not required for operation.**
- Stainless steel interior and exterior finish.
- Solid-state control panel with main power, light, and temperature readout: humidity control optional.
- Condensate evaporator provided for a totally self-contained system. Remote refrigeration available.
- **Average case temperature of 38° to 40°F is maintained in the bottom display area. Glass shelves are non-refrigerated.**
- Oversized coil and low-velocity fan system maintains high humidity and product freshness.
- UL Safety and UL Sanitation Listed.
- Designed for continuous case line-ups.
- Full length, two step deck display risers.
- Appliance receptacle provided on back.

MARKET SERIES REFRIGERATED BAKERY CASE

OPTIONAL ACCESSORIES:

- ☐ Special Case Height (50" or 52")
- ☐ Front Bumper Rail (Black, White, Green, Gray)
- ☐ Reflective End Glass
- ☐ Decorative End Panel (Black, White, Green, Gray)
- ☐ Remote Refrigeration
- ☐ Top Service Shelf
- ☐ Humidity Control
- ☐ Accent Base Light
- ☐ Promolux Lighting
- ☐ Condensate Pump

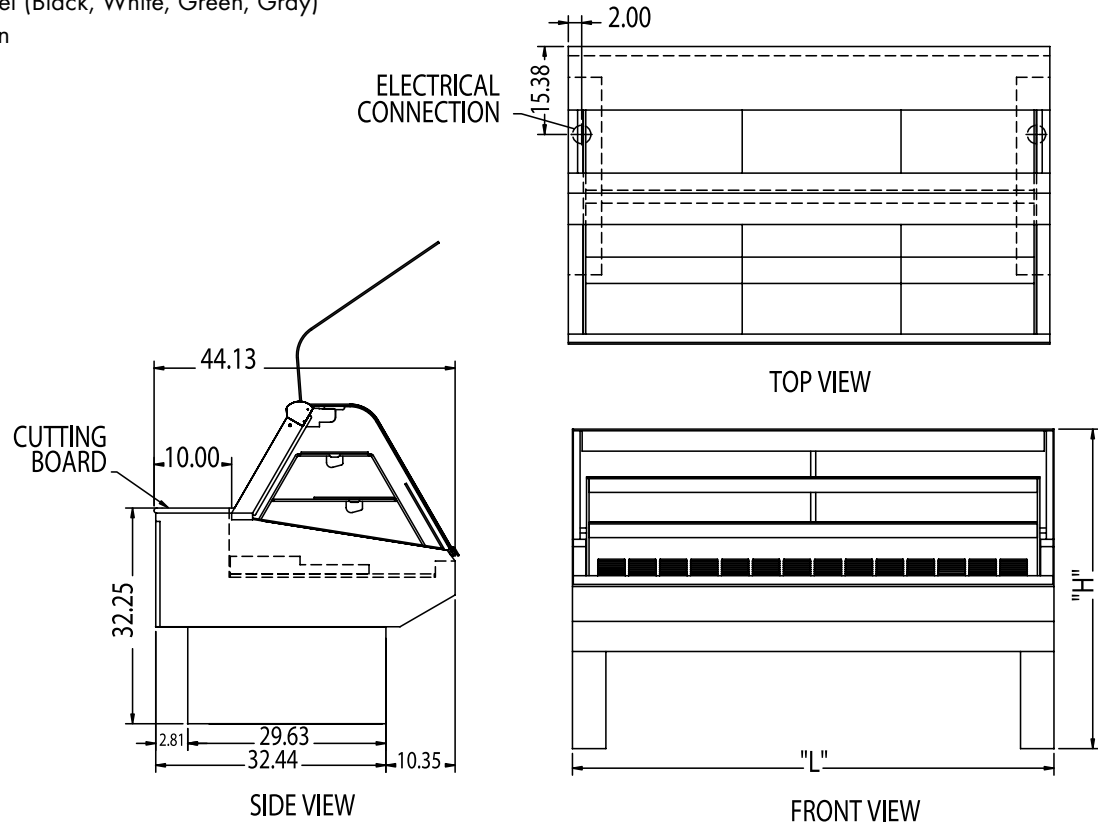

SPECIFICATIONS:

Model	*Dimensions L W H	Approx. Shipping Weight (lbs)	** Self-Contained 120/60/1	** Remote 120/60/1
☐ SQ-3CB	36" x 44 1/8" x 48"	790	1/2 HP • 11.5 AMPS	6 AMPS
☐ SQ-4CB	48" x 44 1/8" x 48"	795	1/2 HP • 13.8 AMPS	7 AMPS
☐ SQ-5CB	60" x 44 1/8" x 48"	845	1/2 HP • 13.8 AMPS	7 AMPS
☐ SQ-6CB	72" x 44 1/8" x 48"	1,135	1/2 HP • 14.8 AMPS	7 AMPS
☐ SQ-8CB	96" x 44 1/8" x 48"	1,235	3/4 HP • 16.0 AMPS	8 AMPS

* Without decorative end panel.

** Plus general receptacle 120V, 15 AMP. (2nd circuit required.)

- **When ordering, specify case line-up and pedestal or panel design.**
- Refrigerated cases are designed to operate in an environment of 75° ambient and 55% relative humidity.
- Due to continuing engineering improvements, specifications are subject to change without notice.
- **Refrigerated bottom display deck, non-refrigerated shelves.**



The Signature of Quality

FEDERAL INDUSTRIES
A Standex Company

215 FEDERAL AVENUE, BELLEVILLE, WISCONSIN 53508-9201

PHONE: 800-356-4206

EMAIL: geninfo@federalind.com

FAX: 608-424-3234

WEBSITE: www.federalind.com

