

NOR-LAKE, INCORPORATED
727 Second Street
Hudson, Wisconsin 54016

800-955-5253
715-386-2323
866-961-5253 Parts
800-388-5253 Service
715-386-4291 FAX
www.norlake.com



UNDERCOUNTER BLAST CHILLER / FREEZER



NBCF48/28-4A

OPTIONAL HACCP
DATA PRINTER

USB PORT

PROJECT:

ITEM NUMBER:

MODEL NUMBER:

UNDERCOUNTER BLAST CHILLER / FREEZER

SPECIFICATIONS FOR: NBCF48/28-4A

- **Exterior Finish:** Stainless steel exterior; satin scotchbrite finish on door, side panels and control panel.
- **Interior Finish:** Stainless steel; one-piece construction with rounded internal corners
- **Insulation:** The complete cabinet and door(s) are foamed-in-place with CFC-free polyurethane insulation.
- **Hardware:** 3 removable stainless steel wire racks with (9) 1.2" vertical spacing intervals; 4 sets pan guides; plastic defrost drip tray on outer base; stainless steel feet adjustable from 5.9" to 7.9"; standard product core L-shaped probe for easy extraction; self-closing door with full-height outer stainless steel handle; removable magnetic gasket; door frame heating element.
- **Electrical:** 220/60/1
- **Instrumentation:** LCD control board with USB port, encoder, multi-lingual, multi-sector; blast chilling with variable cycle progression; 20 pre-set blast-chilling cycles; displays interior temperature, product temperature and ventilation speed; maintain temperature at end of blast chilling/freezing cycle.
- **Refrigeration:** R-404a refrigerant; evaporator temperature control with thermostatic valve; hinged evaporator coil cover for easy cleaning of evaporator coil; copper/aluminum corrosion-proofed evaporator coil; electronically controlled, electric defrost; drain outlet for easy interior cleaning. Scheduled or time cycled proving for food leavening. The chilling process will take product from +194°F to +37°F in 90 minutes and the freezing process will take product from +194°F to 0°F in 240 minutes.
- **Approvals:** ETL Safety and Sanitation listed **

STANDARD FEATURES

- Adjustable feet
- CFC-free polyurethane insulation
- Copper/aluminum corrosion resistant evaporator
- Door frame heater
- Electronically controlled, electrical defrost
- Hermetic compressor
- L-shaped probe
- LCD control board


- R-404a refrigerant
- Removable magnetic door gasket
- Reversible door
- Stainless steel exterior
- Stainless steel half racks
- Stainless steel, polished interior
- Approvals: ETL Safety & Sanitation**
- Warranties: 1 year parts and labor, 5 year compressor

OPTIONAL FEATURES *


- Additional pan guides
- Additional wire shelves
- HACCP data printer
- 3-1/2" casters

* Most options are available one week from receipt of order. Please contact us for specific questions.


** ETL Sanitation is Intertek Labs Certification Mark which indicates that ETL has tested the equipment to applicable NSF Standards.



TOP VIEW

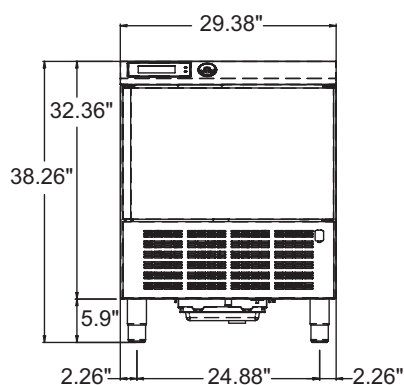

FRONT VIEW

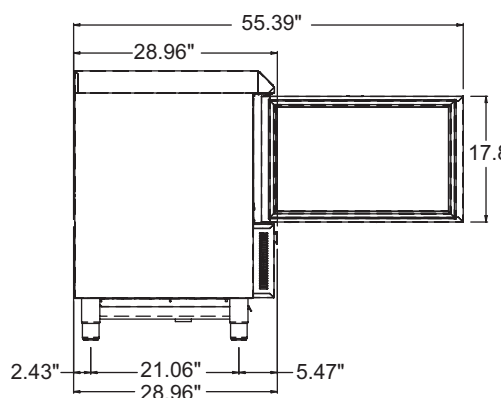

SIDE VIEW

SPECIFICATIONS

Model	NBCF48/28-4A
<i>Crated Weight (lbs) (kg)</i>	276 (125)
<i>Crated Height (in) (cm)</i>	46 (117)
<i>Crated Width (in) (cm)</i>	32 (81)
<i>Crated Depth (in) (cm)</i>	30 (77)
<i>Overall Height (in) (cm) *</i>	38-1/4 (96)
<i>Overall Width (in) (cm)</i>	29-3/8 (73)
<i>Overall Depth (in) (cm)</i>	28-15/16 (72)
<i>Number of Shelves</i>	3
<i>Shelf Size (in)</i>	15.7 x 23.6
<i>Max Pan Capacity</i>	
12" x 20" x 2.5"	4
12" x 20" x 1.5"	6
18" x 26" x 2.5"	-
18" x 26" x 1.5"	-
<i>Condensing Unit Size</i>	1 HP
<i>Refrigerant</i>	R-404a
<i>Electrical Characteristics</i>	220/60/1
<i>Cord and Plug Furnished</i>	No
<i>Total Amp Draw</i>	7.5

Specifications subject to change without notice.

** Drawings shown with legs. 3-1/2" casters optional.*



NORLAKE®

Revision Date: 08/15
© 2015 NOR-LAKE, INC.
Printed in the U.S.A.
Part Number: 143351