

BUNN[®] INTERNATIONAL

Silver Series[®] 2-Flavour

Cold Beverage System

with LED Lighted Graphics and Portion Control Dispense

ITEM#

PROJECT

DATE



JDF-2SA

w/Lighted Graphics

Dimensions: 33.1"H x 10"W x 25.5"D
(84.1 cm H x 24.9 cm W x 64.8 cm D)

(Refillable containers sold separately)

Features

Gourmet Cold Beverage System

Cold beverage dispenser with High Intensity[®] mixing delivers superior drinks consistently glass after glass

- Three-size portion-control dispense.
- LED lighted door graphics bring high visibility to front-of-house applications.
- One dispenser delivers both frozen and ambient products increasing profits by lowering costs.
- Drink consistency assured with the BUNN High Intensity[®] mixing technology.
- Pumps and mixes 2+1 to 11+1 concentrated beverages, including 4+1 high viscosity and 5+1 juices accurately and consistently.
- Quick dispense with 1.0 to 1.5 ounces (29.6 to 44.4 ml) per second flow rate.
- 7" (17.8 cm) cup clearance accommodates most juice containers.
- 8 lb. (3.6 kg) ice bank provides superior cold drink capacity.
- Advanced concentrate pump designed for easy setup, accuracy and durability.
- Service-friendly design including modular dispense deck makes service fast and simple.
- Preventive maintenance kit: 39690.0000.



For current specification sheets and other information, go to www.bunn.com.

Related Products

Easy Clear[®] EQHP-10
Product No. : 39000.0004



Easy Clear[®] EQHP-10CRTG
Product No. : 39000.1004

Ambient Conversion Kit
Product No.: 33699.0001
(one kit required per dispense station - photo shows 4-dispense station unit with one container and three ambient conversion kits)



Refillable Juice Container
Capacity: 1 Gallon
Product No.: 39302.0000



Portion Control Membrane Switch Kit
Product No. : 41298.0000

Push-Hold Membrane Switch Kit
Product No. : 41299.0000

Dimensions & Specifications

Model	Product #	Volts	Amps	Capacity	Shipping Weight	Cord Attached	Agency
JDF-2SA	37900.0017	230	4	4 (5 oz.) drinks/min	103 lbs.	Yes	CE NSF
(portion control, juice display)				4 (148 mL) drinks/min	46.7 kg		


Capacity: 1 Gallon (3.8 L)

75°F (24°C) incoming water for 180 drinks without exceeding 40°F (4.4°C) finished drink temperature.

Electrical: Model requires 2-wire grounded service rated 220-240V, single phase, 50/60 Hz.

Plumbing: 20-100 psi (138 - 690 kPa). Machine supplied with $\frac{3}{8}$ " male fitting.

Refrigeration: R-134a refrigerant, 10 oz. (.28 kg), 10 lb. (4.5 kg) ice bank system

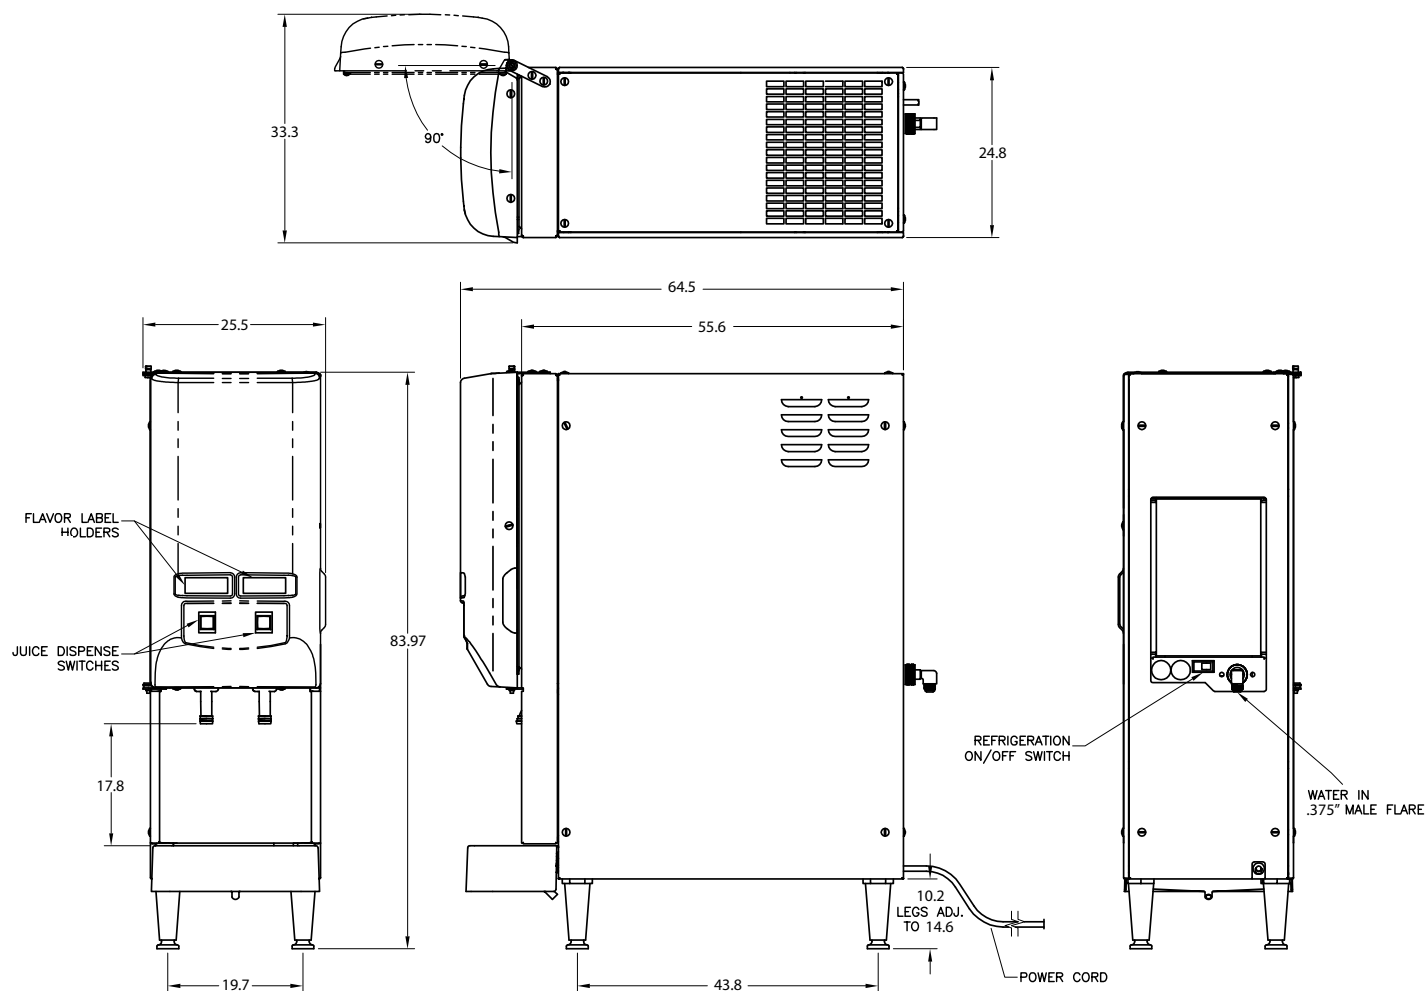

Bunn-O-Matic® Corporation - 1400 Stevenson Drive Springfield, Illinois 62703 • USA • +1-217-529-6601 • Fax +1-217-529-2827 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in centimeters.

7/10 © Bunn-O-Matic Corporation